
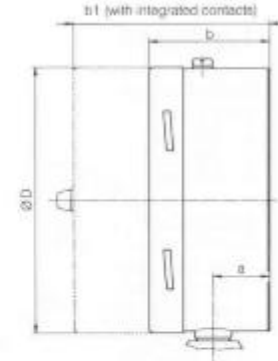
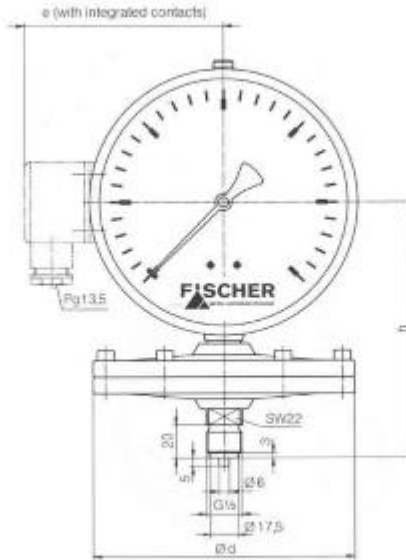


Measurements



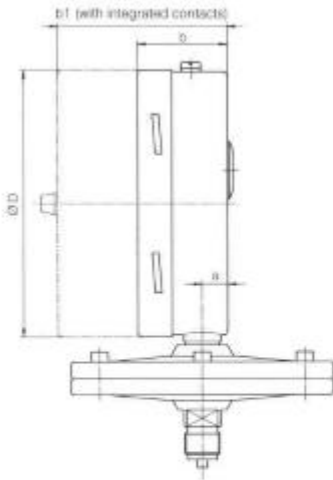


Safety Case acc. DIN 16006

case Ø	ØD	a	b	b1
100	101	31	67	115,5
160	161	34	72,5	118

Connection acc. DIN 16288 Standard Design

scale range	case Ø	ØD	Ød	a	h	b	b1	e
≥ 0,6 bar	100	101	99	16	128	52	100	89
	160	161	99	15,5	158	54	102	119
≤ 400 mbar	100	101	157	16	125	52	100	89
	160	161	157	15,5	155	54	102	119

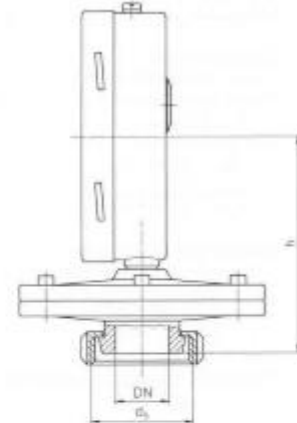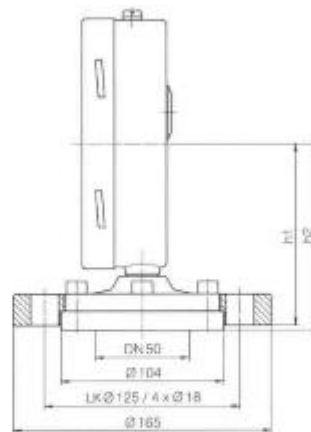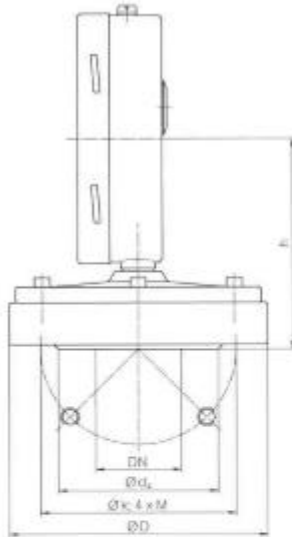

Flange Connection acc. DIN PN 40

DN	ØD scale range:		Ød ₁	Øk	M	h case diam.	
	≥ 0,6 bar	≤ 400 mbar				100	160
15	105	157	45	65	M12	109	139
20	105	157	58	75	M12	106	136
25	115	157	68	85	M12	106	136
40	150	157	88	110	M16	106	136
50	165	165	102	125	M16	106	136

Male Fitting Flange

case Ø	h1	h2
100	117	120
160	147	150

Screwed Tube Connection acc. DIN 11851

DN	d _s acc. DIN 405 T1	h case diam.	
		100	160
25	RD 52 x 1/6	107	137
50	RD 78 x 1/6	113	143